


Industrial Line

Technical Data

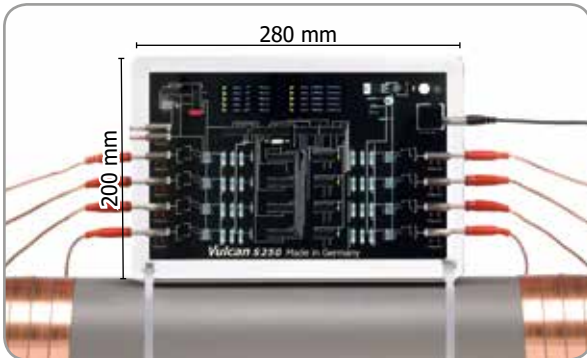

Vulcan S250

| | |
|---|--------------------------------------|
| Maximum capacity | 350 m ³ /h (1540 gpm) |
| Pipe diameter | 4" - 10" 100 - 250 mm |
| Voltage | 24 Volt |
| Wattage | 2.75 Watt |
| Impulse cable Band width | 8 x 10 m (8 x 32'9") 20 mm (0.8") |
| Measurements (electronic unit) | 280/200/50 mm 11.0"/7.9"/2.0" |
| Frequency range | 3-32 kHz |
| Required space | 2500 mm 99" |
| Programs | 10 |
| Electronic Switching power supply unit | |
| In | 87-260 Volt 50-60 Hz |
| Out | 24 Volt 600 mA |

Scope of delivery

- 1 Vulcan S250 electronic unit
- 8 Vulcan Impulse bands
- 1 Power supply
- 20 Cable ties
- 1 Product brochure
- 1 Warranty card

Shipping Measurements (gross)

| | | |
|--------------------|----------------------------|-----------------------------------|
| Single unit | 67 x 40 x 49 cm 13.5 kg | 26.4" x 15.7" x 19.3" 29.8 lbs |
|--------------------|----------------------------|-----------------------------------|

